


UL EN50200 Fire Resistance Cable 300/500V PH30/PH120

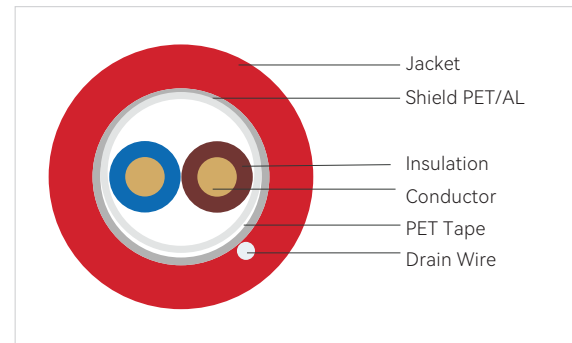

KEY FEATURES

For fixed indoor installation in dry or wet environments. They can be installed on platforms, pipes, conduits and similar systems.

APPLICATION

Suitable for the transmission of signals and controls for electrical equipment when you need maximum security against fire, such as emergency lighting and alarm systems, automatic fire detection, fire extinguishing equipment, automatic opening doors, ventilation systems and conditioning, emergency telephone systems.

CONSTRUCTION

Conductors:

Plain annealed copper wire

Insulation:

Fire resistant silicone rubber

Shield:

PET Tape/Aluminum Foil for PH120

Coverage 100 % (Overlapping 20%)

With Copper to BS 6360 Solid 0.50mm

Outer Sheath:

FR-LSZH (Red or White)

STANDARD REFERENCES

- EN 50200: 2015
- EN 61034-2: 2005+A1:2013
- EN 60754-1: 2014

POPULAR PACKAGING

- 100M/Roll,
- 300M/Wooden Spool,
- 500M/Wooden Spool

IDENTIFICATION OF CORES

- 2 cores: ● ●
- 3 cores: ● ● ●

ITEM NAME

EN 50200 PH120 2x1.0mm ²
EN 50200 PH120 2x1.5mm ²
EN 50200 PH120 2x2.5mm ²
EN 50200 PH120 3x1.0mm ²
EN 50200 PH120 3x1.5mm ²
EN 50200 PH120 3x2.5mm ²

